



[Base de conocimiento](#) > [Using Deskpro](#) > [How can I specify a sub-status in stats?](#)


## How can I specify a sub-status in stats?

Chynah Hayde - 2025-04-02 - [Comentarios \(0\)](#) - [Using Deskpro](#)

You can specify sub-statuses in the WHERE clause, for example:

```
WHERE tickets.ticket_status.id = 4
```

You can find out the ID of a particular sub-status by going to **Admin > Ticket Structure > Statuses**, and selecting the sub-status you want from the table:

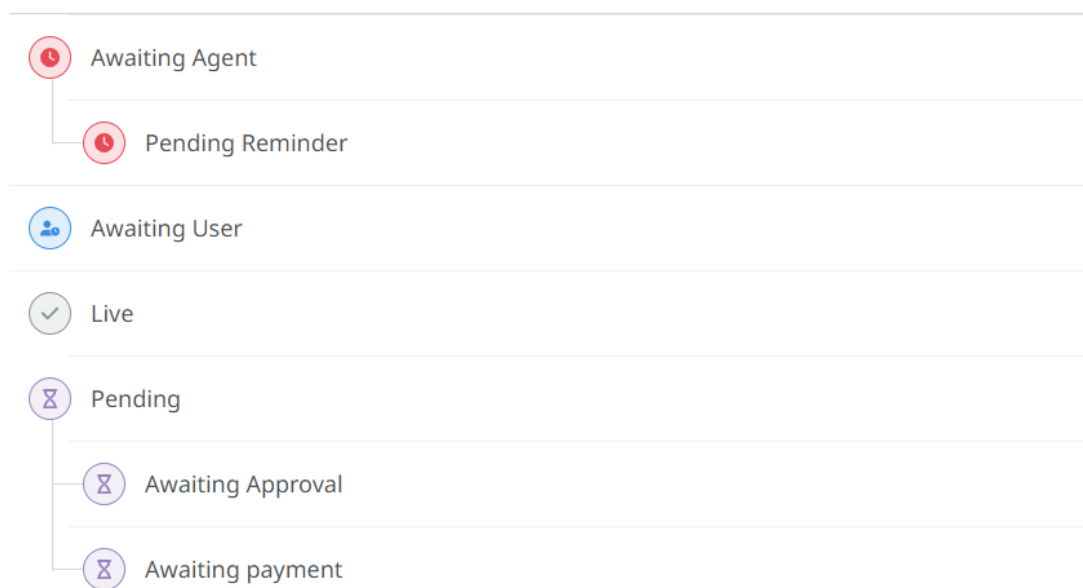

The ID will appear on the top right-hand side of the menu:

id: pending.3



## Edit: Awaiting Approval

Parent Status\*

 Pending

▼

Name\*

Awaiting Approval

Total Waiting Time

Time spent in this status does NOT count to waiting time

▼

Ticket count

1

Below is an example of a query you can run using this Pending Sub-status:

```
SELECT tickets.id, tickets.subject, tickets.ticket_status.title
FROM tickets
WHERE tickets.ticket_status.id = 3
```

We have used **tickets.ticket\_status.title** in the SELECT clause to display the correct sub-status name.