



[Base de Conhecimentos](#) > [Developer & Reporting](#) > [API](#) > [Basic API Usage](#)

Basic API Usage


Ashley Dawson - 2025-11-11 - [Comentários \(0\)](#) - [API](#)

In this article, we're going to describe a series of common API use cases to get you started using the Deskpro API.

Deskpro provides a REST API; an extensive list of all API endpoints can be found in our [API reference document](#). We use widely supported JSON as a data format, meaning almost any system can talk to Deskpro. You can use the Deskpro API to access all functions of the system, helping you to automate reading and writing data to Deskpro.

Authentication

The simplest way to authenticate is by using an API key. You can create an API key via Deskpro's admin interface, under **Apps & Integrations > API Keys**

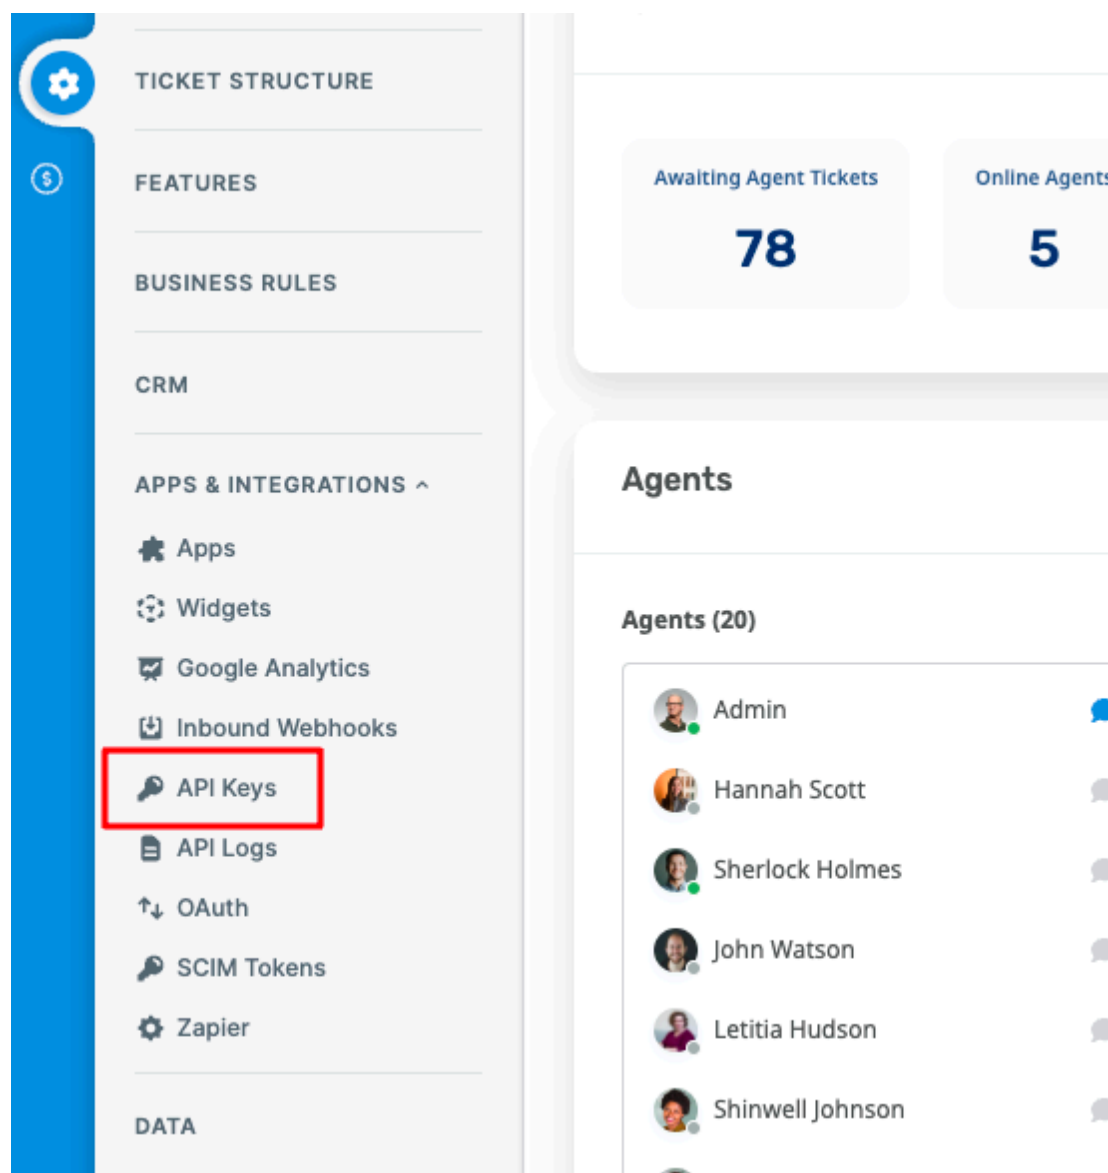

Create a new API key and enter the following information:

- **Name:** this can be anything you like, it's to identify the API key
- **API Version:** select **API v2**
- **API Key Context:** select a user you'd like to consume the API as. E.g. all requests to the API using this API key will be in the context of the selected user

My API Key

☒ API v2

Select...

 Irene Adler

Cancel

Once you've created your new API key, click "Create" and you'll see your new API key appear in the list. Click on it and you should see the following:

Last Hour
0
0
0
0

×

id: 4

Edit: My API Key

Name*

My API Key

Used as note for this API key. You could use this field as a reminder of what this API key will be used for.

API Key Code

Show API Key

Hourly Limit

Daily Limit

API Version*

API v2

API Key Context* ?

Greg Lestrade

All API request will be executed in the context of this agent.

Allow Tags

+ add

*

Disallow Tags

+ add

*.delete


Click "Show API Key" and copy the API for later use.


```
{
  "subject": "My First Ticket",
  "person": "joanne.bloggs@example.com",
  "message": {
    "message": "<p>This is a rich <b>HTML</b> message</p>",
    "format": "html"
  }
}
```

Creating a Ticket with an Attachment

Creating a ticket with attachments contains extra steps and we first need to upload the attachments to Deskpro and then "link" them to the new ticket.

In order to upload an attachment, or blob (a fancy name for a binary object), you must first send a "form-data" request to the blob endpoint. The best way to do this is by using a REST client like [PostMan](#) to do this. In the screenshot below we show uploading a file to the **POST /api/v2/blobs/temp** endpoint via [PostMan](#).

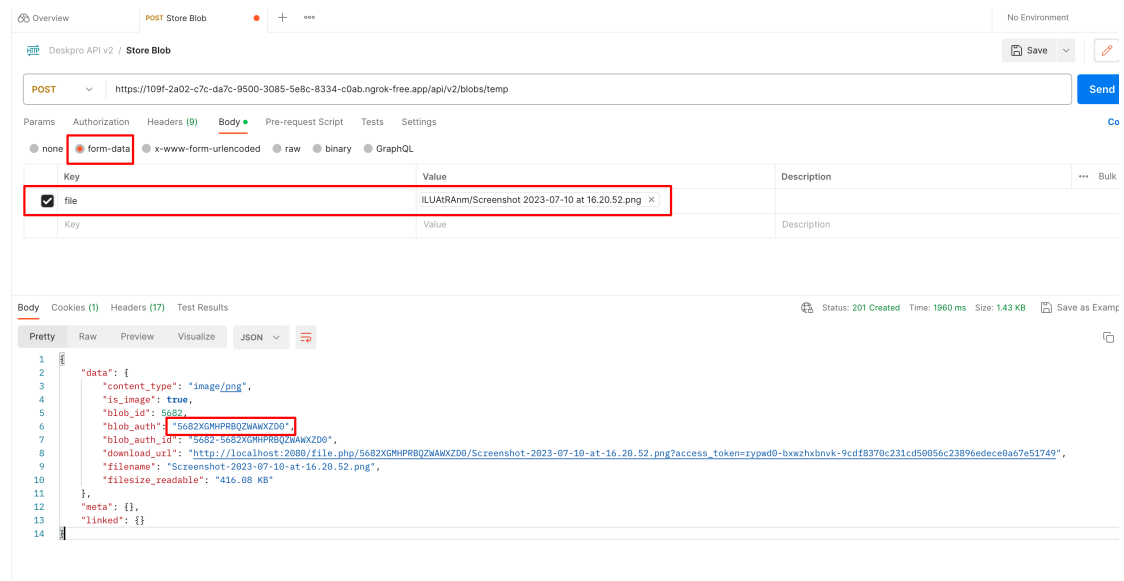

Once your attachment has been uploaded as a blob, Deskpro will return an "Auth Code", seen in the above example as the property "blob_auth". You can now use this in the next step when creating a new ticket.

POST `https://my-helpdesk.deskpro.com/api/v2/tickets`
 Content-Type: application/json
 Authorization: key 4:G24M3K6Y3R3H8DN9B6QGH3NW4

```
{
  "subject": "My First Ticket",
  "person": "joanne.bloggs@example.com",
  "message": {
    "message": "<p>This is a rich <b>HTML</b> message</p>",
    "format": "html",
    "attachments": [{
      "blob_auth": "3AAAAAAAAAAAAAAAAA0",
      "is_inline": false
    }]
  }
}
```

Note that the "is_inline" property is set to **false**, this means that the file is attached to the message and not inline with its content.

Assigning a Ticket

To assign a ticket to an agent, you must first find the agent's ID. You can either find this in Deskpro itself alongside the agent, or you can get all agents from the API. below is a screenshot of where to locate the ID of an agent in the **Admin > Agents > Agent Profiles** section of Deskpro.

Active Deleted							
<input type="checkbox"/>	Name	Email	Teams	Permission Groups	Departments		ID
<input type="checkbox"/>	Admin	james.godwin@deskpro.com	2218 Energy Support	All permissions			1
<input type="checkbox"/>	Agent	phil.rigby@deskpro.com	Complaints	All permissions			42
<input type="checkbox"/>	Alesia Burvin	alesia.burvin@deskpro.com	Sales	All permissions			77

To fetch a collection of agents from the Deskpro API you can make the following request:

```
GET https://my-helpdesk.deskpro.com/api/v2/agents
Accept: application/json
Authorization: key 4:G24M3K6Y3R3H8DN9B6QGH3NW4
```

The response will contain a collection of agents, including their IDs.

Next, let's update our existing ticket to assign the agent. You can do this by calling the update ticket endpoint as follows:

```
PUT https://my-helpdesk.deskpro.com/api/v2/tickets/321
Content-Type: application/json
Authorization: key 4:G24M3K6Y3R3H8DN9B6QGH3NW4
```

```
{
  "agent": 42
}
```

The request above assigns the ticket with ID "321" to the agent with ID "42"

Ticket Status Filtering

By default, when retrieving tickets through the Deskpro API (including list and queue endpoints), only **active** tickets are returned. This behaviour helps improve performance for large databases.

Active tickets include those with the following statuses:

live, awaiting_agent, awaiting_user, and pending.

Inactive tickets include:

resolved, archived, and hidden (with spam and deleted being sub-statuses of hidden).

If you do **not** include a status parameter in your request, the API will only return **active** tickets.

When you explicitly request an inactive status (for example, status=resolved), the API automatically switches to **all-mode**, meaning it will include tickets that match both active and inactive statuses based on your query.

Examples:

Retrieve only active tickets (default):

```
GET /api/v2/tickets?date_created=2019-06-16T23:01:13Z--2020-04-07T15:23:30Z
```

Retrieve resolved tickets:

```
GET /api/v2/tickets?date_created=2019-06-16T23:01:13Z--2020-04-07T15:23:30Z&status=resolved
```

You can find many other endpoints in our [API reference document](#).

- Tags
- [API](#)